

U




MODEL[OUT-IN] Metric size

MODEL	Outer Dia. mm	Inner Dia. mm	Packing Unit (m)	The radius of curvature (mm)	Burst pressure (kg/cm ²)	W.G (g/m)	Color							
							C	BK	R	BU	Y	G	W	O
U-03020	3	2	200	8	30	7	•	•	•	•	•	•	•	•
U-04020	4	2	200	10	30	9	•	•	•	•	•	•	•	•
U-04025	4	2.5	200	10	30	9	•	•	•	•	•	•	•	•
U-06040	6	4	100	15	30	19	•	•	•	•	•	•	•	•
U-08050	8	5	100	24	30	36	•	•	•	•	•	•	•	•
U-08055	8	5.5	100	24	30	36	•	•	•	•	•	•	•	•
U-08060	8	6	100	24	30	36	•	•	•	•	•	•	•	•
U-10065	10	6.5	100	30	30	54	•	•	•	•	•	•	•	•
U-12080	12	8	100	36	30	74	•	•	•	•	•	•	•	•
U-12090	12	9	100	36	30	74	•	•	•	•	•	•	•	•
U-16110	16	11	50	36	30	128	•	•	•	•	•	•	•	•

MODEL[OUT-IN] Inch Size

MODEL	Outer Dia. mm	Inner Dia. mm	Packing Unit (m)	The radius of curvature (mm)	Burst pressure (kg/cm ²)	W.G (g/m)	Color							
							C	BK	R	BU	Y	G	W	O
U 1/8-1.6	3.17	1.6	200	8	30	7	•	•	•	•	•	•	•	•
U 1/8-2.0	3.17	2	200	8	30	7	•	•	•	•	•	•	•	•
U 5/32-2.0	3.97	2	200	10	30	9	•	•	•	•	•	•	•	•
U 5/32-2.5	3.97	2.5	200	10	30	9	•	•	•	•	•	•	•	•
U 3/16-3.2	4.76	3.2	100	12	30	13	•	•	•	•	•	•	•	•
U 1/4-4.2	6.35	4.2	100	15	30	22	•	•	•	•	•	•	•	•
U 5/16-5.0	7.94	5	100	24	30	36	•	•	•	•	•	•	•	•
U 3/8-6.4	9.52	6.4	100	30	30	53	•	•	•	•	•	•	•	•
U 1/2-8.5	12.7	8.5	100	36	30	85	•	•	•	•	•	•	•	•

UC

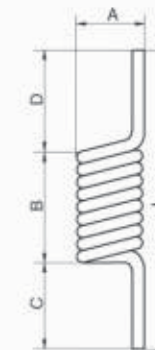

MODEL[OUT-IN] Metric size

MODEL	O.D mm	I.D mm	Length (m)	Working (m)	A	B	C	D	L	Color							
										C	BK	R	BU	Y	G	W	O
UC-0402-15	4	2	1.5	1.2	25.3	78	70	70	218	•	•	•	•	•	•	•	•
UC-0402-30	4	2	3	2.4	25.3	167	70	70	307	•	•	•	•	•	•	•	•
UC-0402-45	4	2	4.5	3.6	25.3	257	70	70	397	•	•	•	•	•	•	•	•
UC-0604-15	6	4	1.5	1.2	42	69	80	80	229	•	•	•	•	•	•	•	•
UC-0604-30	6	4	3	2.4	42	150	80	80	310	•	•	•	•	•	•	•	•
UC-0604-45	6	4	4.5	3.6	42	228	80	80	388	•	•	•	•	•	•	•	•
UC-0805-35	8	5	3.5	2.8	50	200	90	90	380	•	•	•	•	•	•	•	•
UC-0805-50	8	5	5	4	50	291	90	90	471	•	•	•	•	•	•	•	•
UC-0805-75	8	5	7.5	6	50	443	90	90	623	•	•	•	•	•	•	•	•
UC-0805-100	8	5	10	8	50	594	90	90	774	•	•	•	•	•	•	•	•
UC-1065-35	10	6.5	3.5	2.8	62.7	199	100	100	399	•	•	•	•	•	•	•	•
UC-1065-50	10	6.5	5	4	62.7	290	100	100	490	•	•	•	•	•	•	•	•
UC-1065-75	10	6.5	7.5	6	62.7	441	100	100	641	•	•	•	•	•	•	•	•
UC-1065-100	10	6.5	10	8	62.7	592	100	100	792	•	•	•	•	•	•	•	•
UC-1208-35	12	8	3.5	2.8	84.5	174	100	100	374	•	•	•	•	•	•	•	•
UC-1208-50	12	8	5	4	84.5	253	100	100	453	•	•	•	•	•	•	•	•
UC-1208-75	12	8	7.5	6	84.5	385	100	100	585	•	•	•	•	•	•	•	•
UC-1208-100	12	8	10	8	84.5	517	100	100	717	•	•	•	•	•	•	•	•

MODEL[OUT-IN] Inch Size

MODEL	O.D mm	I.D mm	Length (m)	Working (m)	A	B	C	D	L	Color							
										C	BK	R	BU	Y	G	W	O
UC1/8-2.0-1	3.17	2	1	0.8	23.7	49	70	70	189	•	•	•	•	•	•	•	•
UC1/8-2.0-2	3.17	2	2	1.6	23.7	97	70	70	237	•	•	•	•	•	•	•	•
UC1/8-2.0-5	3.17	2	5	4	23.7	243	70	70	383	•	•	•	•	•	•	•	•
UC5/32-2.5-2	3.97	2	2	5.6	25.3	407	70	70	547	•	•	•	•	•	•	•	•
UC5/32-2.5-5	3.97	2	5	6	25.3	437	70	70	577	•	•	•	•	•	•	•	•
UC5/32-2.5-10	3.97	2	10	8	25.3	586	70	70	726	•	•	•	•	•	•	•	•
UC5/32-2.5-15	3.97	2	15	12	25.3	877	70	70	1017	•	•	•	•	•	•	•	•
UC5/32-2.5-20	3.97	2	20	16	25.3	1169	70	70	1309	•	•	•	•	•	•	•	•
UC3/16-3.2-2	4.76	3.2	2	1.6	26.9	135	80	80	295	•	•	•	•	•	•	•	•
UC3/16-3.2-5	4.76	3.2	5	4	26.9	338	80	80	498	•	•	•	•	•	•	•	•
UC3/16-3.2-10	4.76	3.2	10	8	26.9	677	80	80	837	•	•	•	•	•	•	•	•
UC3/16-3.2-15	4.76	3.2	15	12	26.9	1015	80	80	1175	•	•	•	•	•	•	•	•
UC3/16-3.2-20	4.76	4.2	20	16	26.9	1354	80	80	1514	•	•	•	•	•	•	•	•
UC1/4-4.2-2	6.35	4.2	2	1.2	42	69	80	80	229	•	•	•	•	•	•	•	•
UC1/4-4.2-5	6.35	4.2	5	2.4	42	149	80	80	309	•	•	•	•	•	•	•	•
UC1/4-4.2-10	6.35	4.2	10	2.8	42	175	80	80	335	•	•	•	•	•	•	•	•
UC1/4-4.2-15	6.35	4.2	15	3.6	42	228	80	80	388	•	•	•	•	•	•	•	•
UC1/4-4.2-20	6.35	4.2	20	4	42	255	80	80	415	•	•	•	•	•	•	•	•
UC5/16-5.0-5	7.94	5	5	1.2	50	79	90	90	259	•	•	•	•	•	•	•	•
UC5/16-5.0-10	7.94	5	10	2	50	140	90	90	320	•	•	•	•	•	•	•	•
UC5/16-5.0-15	7.94	5	15	2.4	50	170	90	90	350	•	•	•	•	•	•	•	•
UC5/16-5.0-20	7.94	5	20	2.8	50	200	90	90	380	•	•	•	•	•	•	•	•
UC3/8-6.4-5	9.52	6.4	5	2.8	62.7	199	100	100	399	•	•	•	•	•	•	•	•
UC3/8-6.4-10	9.52	6.4	10	4	62.7	290	100	100	490	•	•	•	•	•	•	•	•
UC3/8-6.4-15	9.52	6.4	15	6	62.7	441	100	100	641	•	•	•	•	•	•	•	•
UC3/8-6.4-20	9.52	6.4	20	8	62.7	592	100	100	792	•	•	•	•	•	•	•	•
UC1/2-8.5-5	12.7	8.5	5	2.8	84.5	174	100	100	374	•	•	•	•	•	•	•	•
UC1/2-8.5-10	12.7	8.5	10	4	84.5	253	100	100	453	•	•	•	•	•	•	•	•
UC1/2-8.5-15	12.7	8.5	15	6	84.5	385	100	100	585	•	•	•	•	•	•	•	•
UC1/2-8.5-20	12.7	8.5	20	8	84.5	517	100	100	717	•	•	•	•	•	•	•	•